



# Seed Express BWT™

*The Most Gentle Delivery Unit on the Market!*



Model	Dimension	Capacity	Discharge Ht.
240 BWT	120" L x 96" W x 96" H	240 cu.ft	133" on trailer


We have taken the lead, because we care about your seed! We have partnered with the makers of the "Cleated Belt Technology" to bring the same specs of conveyor speed as the seed companies have at their production plants.

In other words, consider the Seed Express BWT™ as an extension of the seed production plant: Same care, same gentleness, but now it's at your fingertips.

Plus now you can get all those hard to reach planters and drills or use it for customer delivery... We made it easy, just for you!

## *Seed Express BWT Advantages*

### *The Swing*

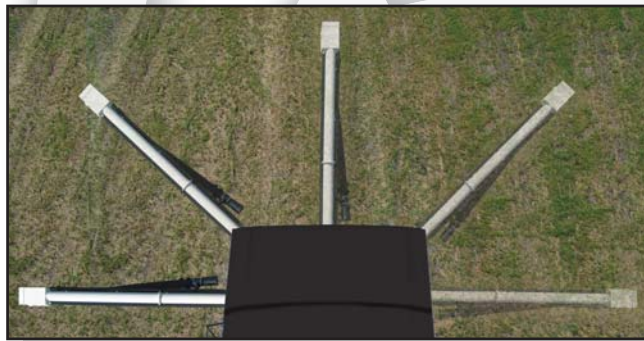

180° Swing gives you the most flexibility to fill your planter or drill from positions left, right, or rear.

### *The Reach*



## *Quality Features*

- ✦ 180° Swing – most variable conveyor available
- ✦ Ultimate Reach Conveyor™
- ✦ Cleated Belt Technology
- ✦ Variable Speed – control your flow
- ✦ Two Separate Compartments
- ✦ Rolled Tarp
- ✦ 32° Conveyor Incline
- ✦ Powder Coated – durable and glossy
- ✦ 5 HP Electric Start Honda Gas Engine
- ✦ Shut off Gates
- ✦ Rubber Lined Hood
- ✦ Scale with Digital Readout
- ✦ Sample Gates



The Ultimate Reach Conveyor™ is designed with the angle, length, and movement to fill the new line of bulk planters; plus a better reach for all other planters.

## The Gentleness



Cleated Belt Technology with gentle tapered cleats that conform to the tube, gently carries the seed, with no roll back, rather than propelling it as traditional conveyors do.

USA Patent # 6,170,646

## Digital Scale Readout



## Sample Gates



## The Variable Flow



We reached industry standard specs, set at 350 ft/min belt speed, with amazing flows of 900 lb/min

Control your flow – new variable speed feature gives you fingertip control over your seed flow.

## We Thought of Everything!



Move and Latch – Not only can you swing your conveyor 180°, you can secure it into your best position every 11½ degrees.



Transport Lock – Pins the conveyor into transport position for your secure traveling.



Safety – The conveyor belts are enclosed for safety, a must for protection, giving you peace of mind. The enclosed belt with internal sweeps keeps the seed from spilling.

## Trailers

Model	Axle Rate	Width	Type
T14000T	(2) 7,000# torsion	8'	Ball 2 <sup>5</sup> / <sub>16</sub>



[www.friesenusa.com](http://www.friesenusa.com)

ph. 800-437-2334  
fax 712-732-1028  
2897 Expansion Blvd.  
Storm Lake, IA 50588

For more information contact:

Nebraska Sales - Jeff Temme

Petersburg, NE

800-790-2676 Cell: 402-843-8440

[jefftemme@yahoo.com](mailto:jefftemme@yahoo.com)

[www.temmeseed.com](http://www.temmeseed.com)